




# SMART CONTROLLER+


Versatile indoor controller with I/O capabilities to control door lock, alarm system and other third-party devices.

- Features up to 4 relays and 8 I/O lines
- Connects directly to TBS devices via RS485
- Network ready
- Easy installation
- DIN rail clamp included

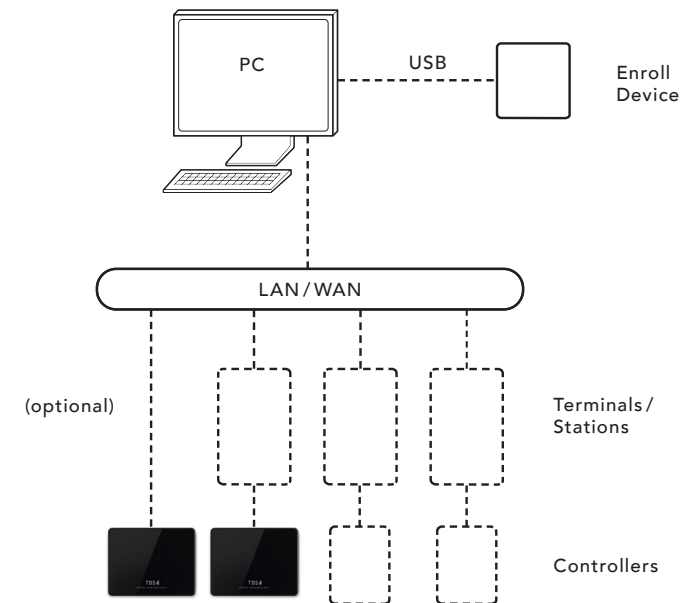



## SMART CONTROLLER+

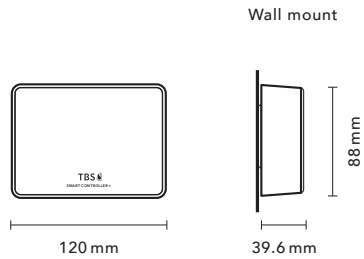

|                       |                                    |
|-----------------------|------------------------------------|
| CPU                   | ARM Cortex-A53 1.2 GHz Quad Core   |
| RAM                   | 1 GB                               |
| Flash                 | 4 GB (MicroSD)                     |
| Connectivity          | 1 × LAN 10/100 Mbps (RJ45)         |
|                       | 4 × USB 2.0                        |
|                       | Bluetooth                          |
| Ports                 | 4 × Relay output                   |
|                       | 4 × General Purpose Input (GPIN)   |
|                       | 4 × General Purpose Output (GPOUT) |
| Operating System      | Embedded Linux                     |
| Software              | SC+ Configurator (web based)       |
| Certifications        | CE                                 |
| Operating Temperature | -20–60°C                           |
| Power                 | 9–36 VDC                           |
| Dimension             | 120 × 80 × 39.6                    |